

1 each WSDPT1-3
EPG WSDPT1-3 SurePump, patented stainless steel Wheeled Sump Drainer, with 1/2 HP, 230 V, 3PH motor, level sensor, 0-5 PSI, 4-20 mA, with 130' of cable, 130' of jacketed CP motor lead, and 130' of 1/8" stainless steel suspension cable with stainless steel clamps. Performance is 5 gpm at 50' TDH.

1 each OS2
Oil/Water Separator, 5 gpm (gasoline), Model OS2, steel construction, Flopak media, expanded effluent chamber for pumpout, 3-point level sensor, stainless steel, galv. steel housing, and steel piping.

Includes product tank full sensor, stainless steel, to be installed in product tank outside of trailer by others.

1 each VES-RT5
Vapor Extraction Package, with Rotron EN707 regenerative blower, 5 HP, 230 V, 3Ø, XP motor, vacuum relief valve, vacuum gauge, dilution air valve with silencer, Rotron aluminum inlet flow meter (70-350 SCFM), CS-16b condensate filter separator with stainless steel high level sensor and galv. steel housing, manual drain, discharge silencer, discharge sample port, and piping and fittings. Mounted, tested, and painted. All piping and valves to be steel.

1 each STAT80-3
Low-Profile Air Stripper, STAT 80, 3-Tray, stainless steel construction, demister, influent/effluent flanges, latches/fasteners, gaskets, 7.5 HP, 230 V, 3PH, XP regenerative blower (EN808), inlet filter, XP low pressure switch, pressure gauge, sample ports (2), 1/2 HP, 230 V, 3PH inlet pump with Viton seal, stainless steel high level sensor with steel housing, inlet flow meter, and piping. Based on 15 gpm of 55 degree F water with 10,000 ppb TPH (Benzene) and discharge of less than 40 ppb with 15% safety factor built-in. Blower has the capacity of adding up to two additional air stripper trays. All piping and valves to be steel.

EPG Companies Inc.


- 1 each Series 1550-PT-R715
EPG Series 1550-PT-R715 Controller, UL listed, 230 V, 3PH, NEMA 4 enclosure with dead front, inner door, stainless steel drip shield, padlocking handle, and main disconnect, to control submersible pump, 1/2 HP, with LevelMaster level control system with simulator, (H)OA switch, green run light, elapsed time meter, intrinsically safe product tank full sensor, red high level alarm light, intrinsically safe 3-point level sensor for OWS, red high level alarm light, transfer pump, 1/2 HP, (H)OA switch, green run light, elapsed time meter, air stripper blower, 7.5 HP, HOA switch, green run light, elapsed time meter, off-delay timer, low air pressure switch, fault on-delay timer, red low air pressure alarm light, blower run to enable transfer pump start, intrinsically safe air stripper sump high level sensor, red high level alarm light, vapor extraction blower, 5 HP, HOA switch, green run light, elapsed time meter, intrinsically safe high condensate level sensor, red high level alarm light, 7-day cycle timer, alarms reset push button, 4-channel alarm autodialer, panel heater and thermostat, power supply for lights, heater, fan, and 1 ea. 15A GFCI mounted on the inner door of the enclosure.
- 1 each SXT8.5X16TA35
Enclosed Trailer, ~8.5'X16'X8'-6" height, blue exterior color, dual 3,500 lb. axles, double rear doors, square body style, stabilizer jacks (4), insulated walls, ceiling, and floor, louver vents, plywood interior lining, aluminum treadplate floor, explosion-proof exhaust fan and thermostat, explosion-proof heater and thermostat, explosion-proof lights and switch, mounting and wiring control panel on outside front of trailer, and mounting, piping, and wiring of all equipment. Includes freight to the site with off-loading by others. Trailer height facilitates adding up to two additional air stripper trays in the future if desired.
- 1 each BJBL600B
EPG Breakout Box, NEMA 4X non-metallic enclosure, junction box for 1 ea. level sensor. Includes desiccant dryer, bellows, and connection terminals.
- 1 each BJBP500
EPG Breakout Box, NEMA 4X non-metallic enclosure for 1 ea. motor lead, includes connection terminals.



SERIES 1 SurePump™

Flow Range 1-7 GPM

60 Hz

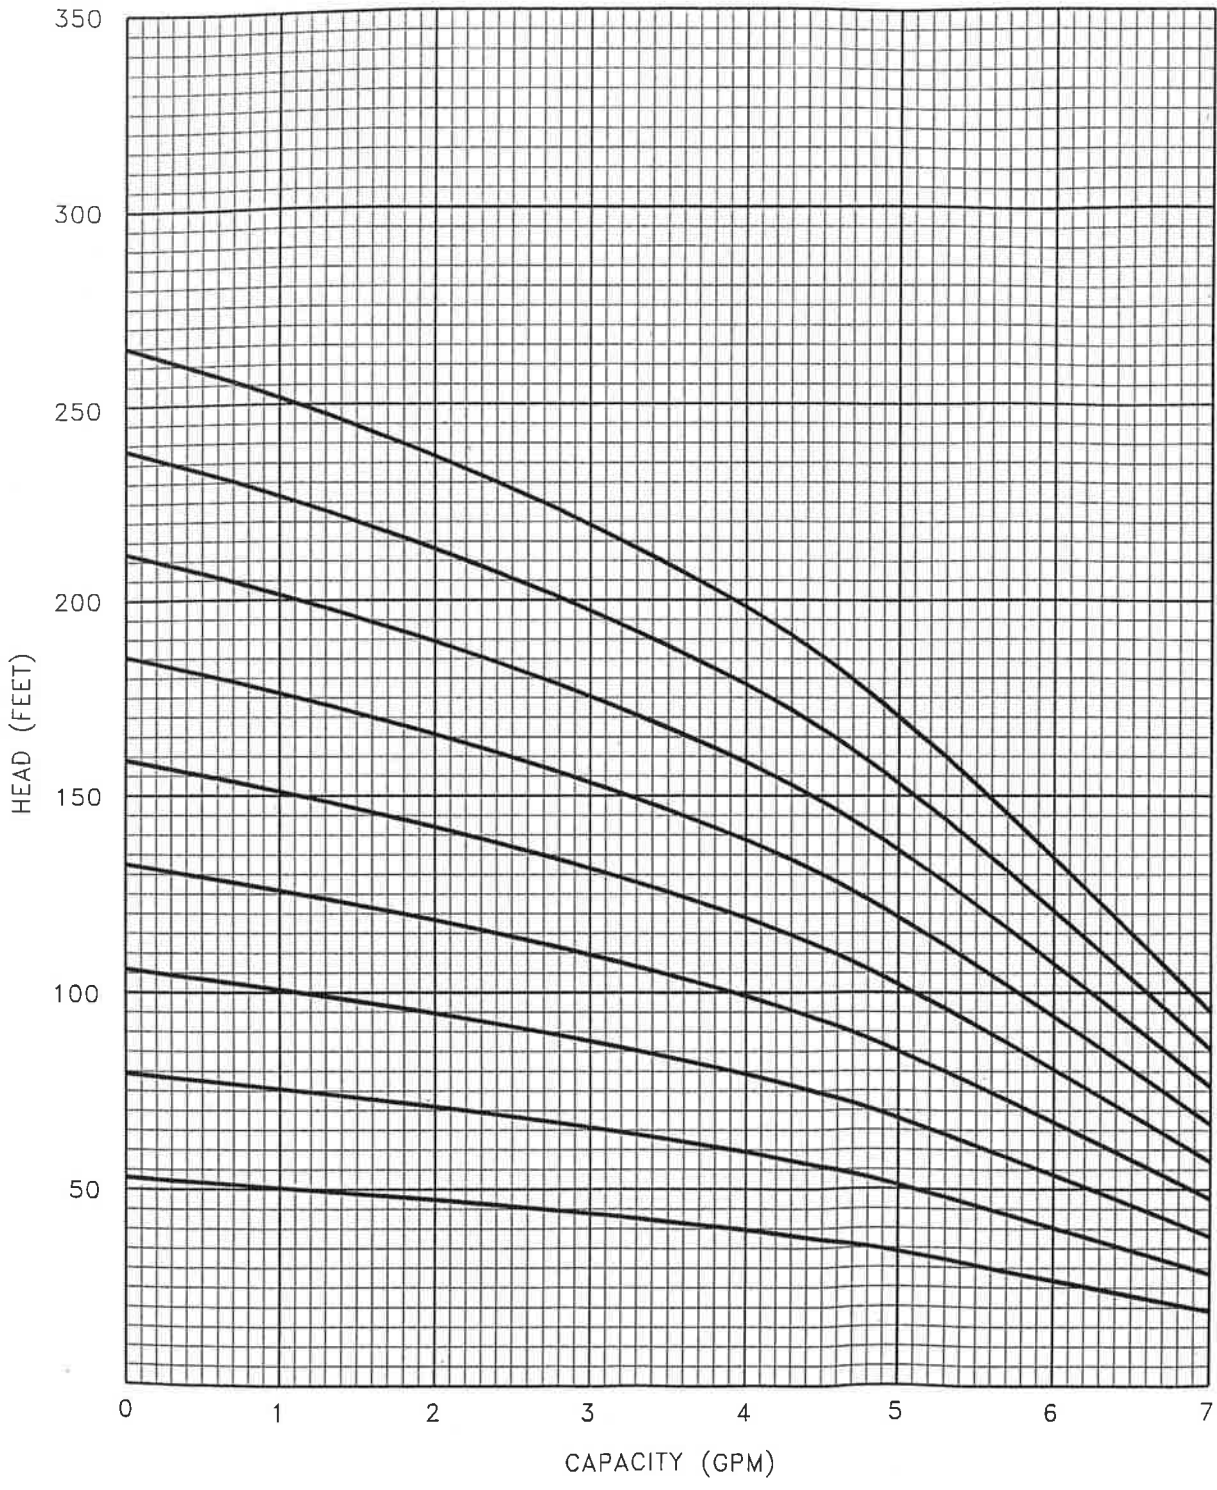

MODEL	HP
1-10	.5
1-9	.5
1-8	.5
1-7	.5
1-6	.5
1-5	.5
1-4	.5
1-3	.5
1-2	.5

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE